

expromo®

eXview **PLUS**

DESIGNED TO REACH THE BACK ROW

eXtra smart and easy to use

- All-in-one eXview PLUS
- Space saving
- Full front access
- Ultra-slim body
- Wider viewing angle
- No more darkened rooms




Bright in every way

All-in-one functionality in an ultra-lightweight ultra-thin package.




Display size (inches)

120" 138" 150" 165" 180" and 220"




Ultra-thin 110mm bezel with 95% screen ratio

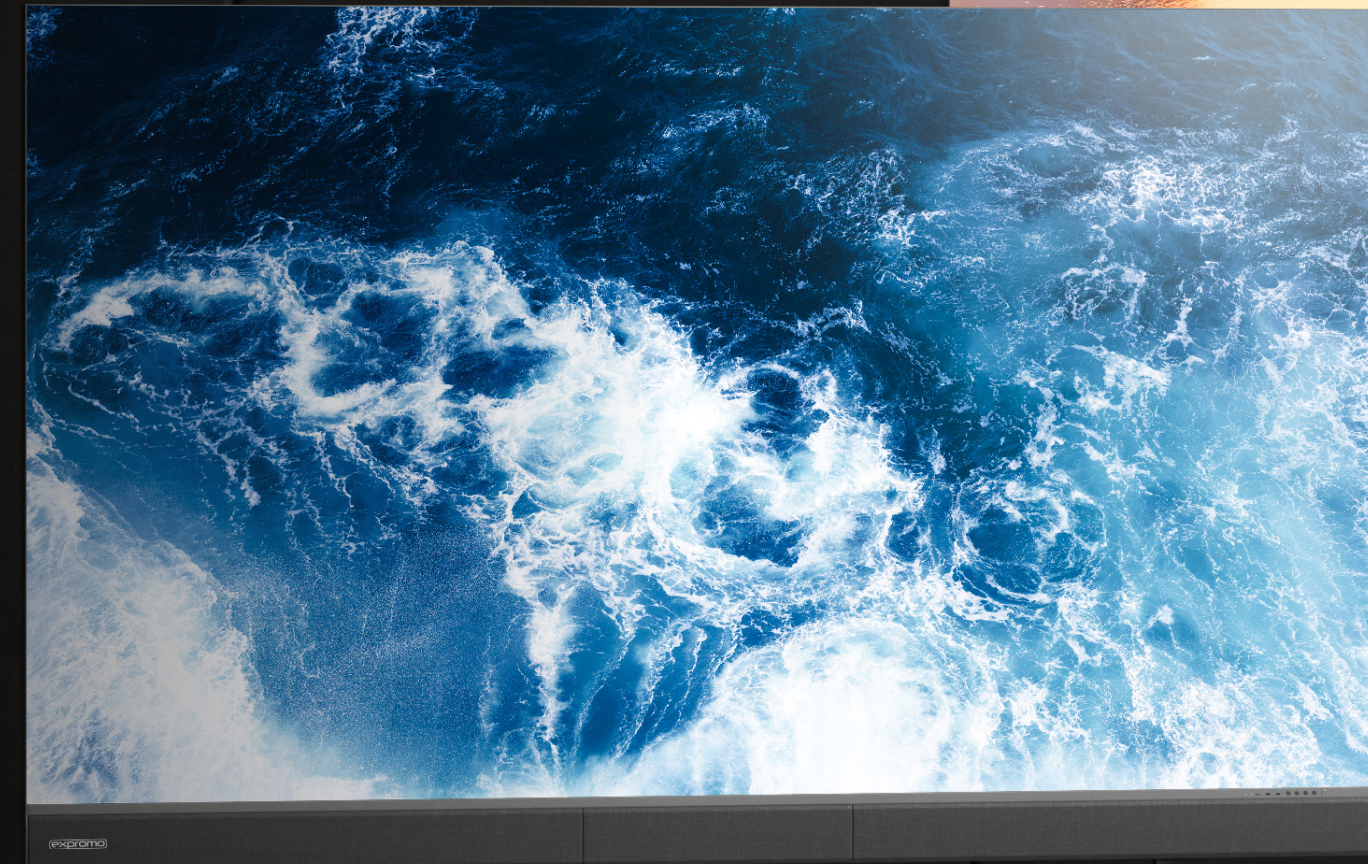

eXemplary contrast and visuals

The **4K clarity and large color gamut** gives a stunning visual experience.
High grayscale under lower brightness provides a first rate depth in a splendid screenscape.

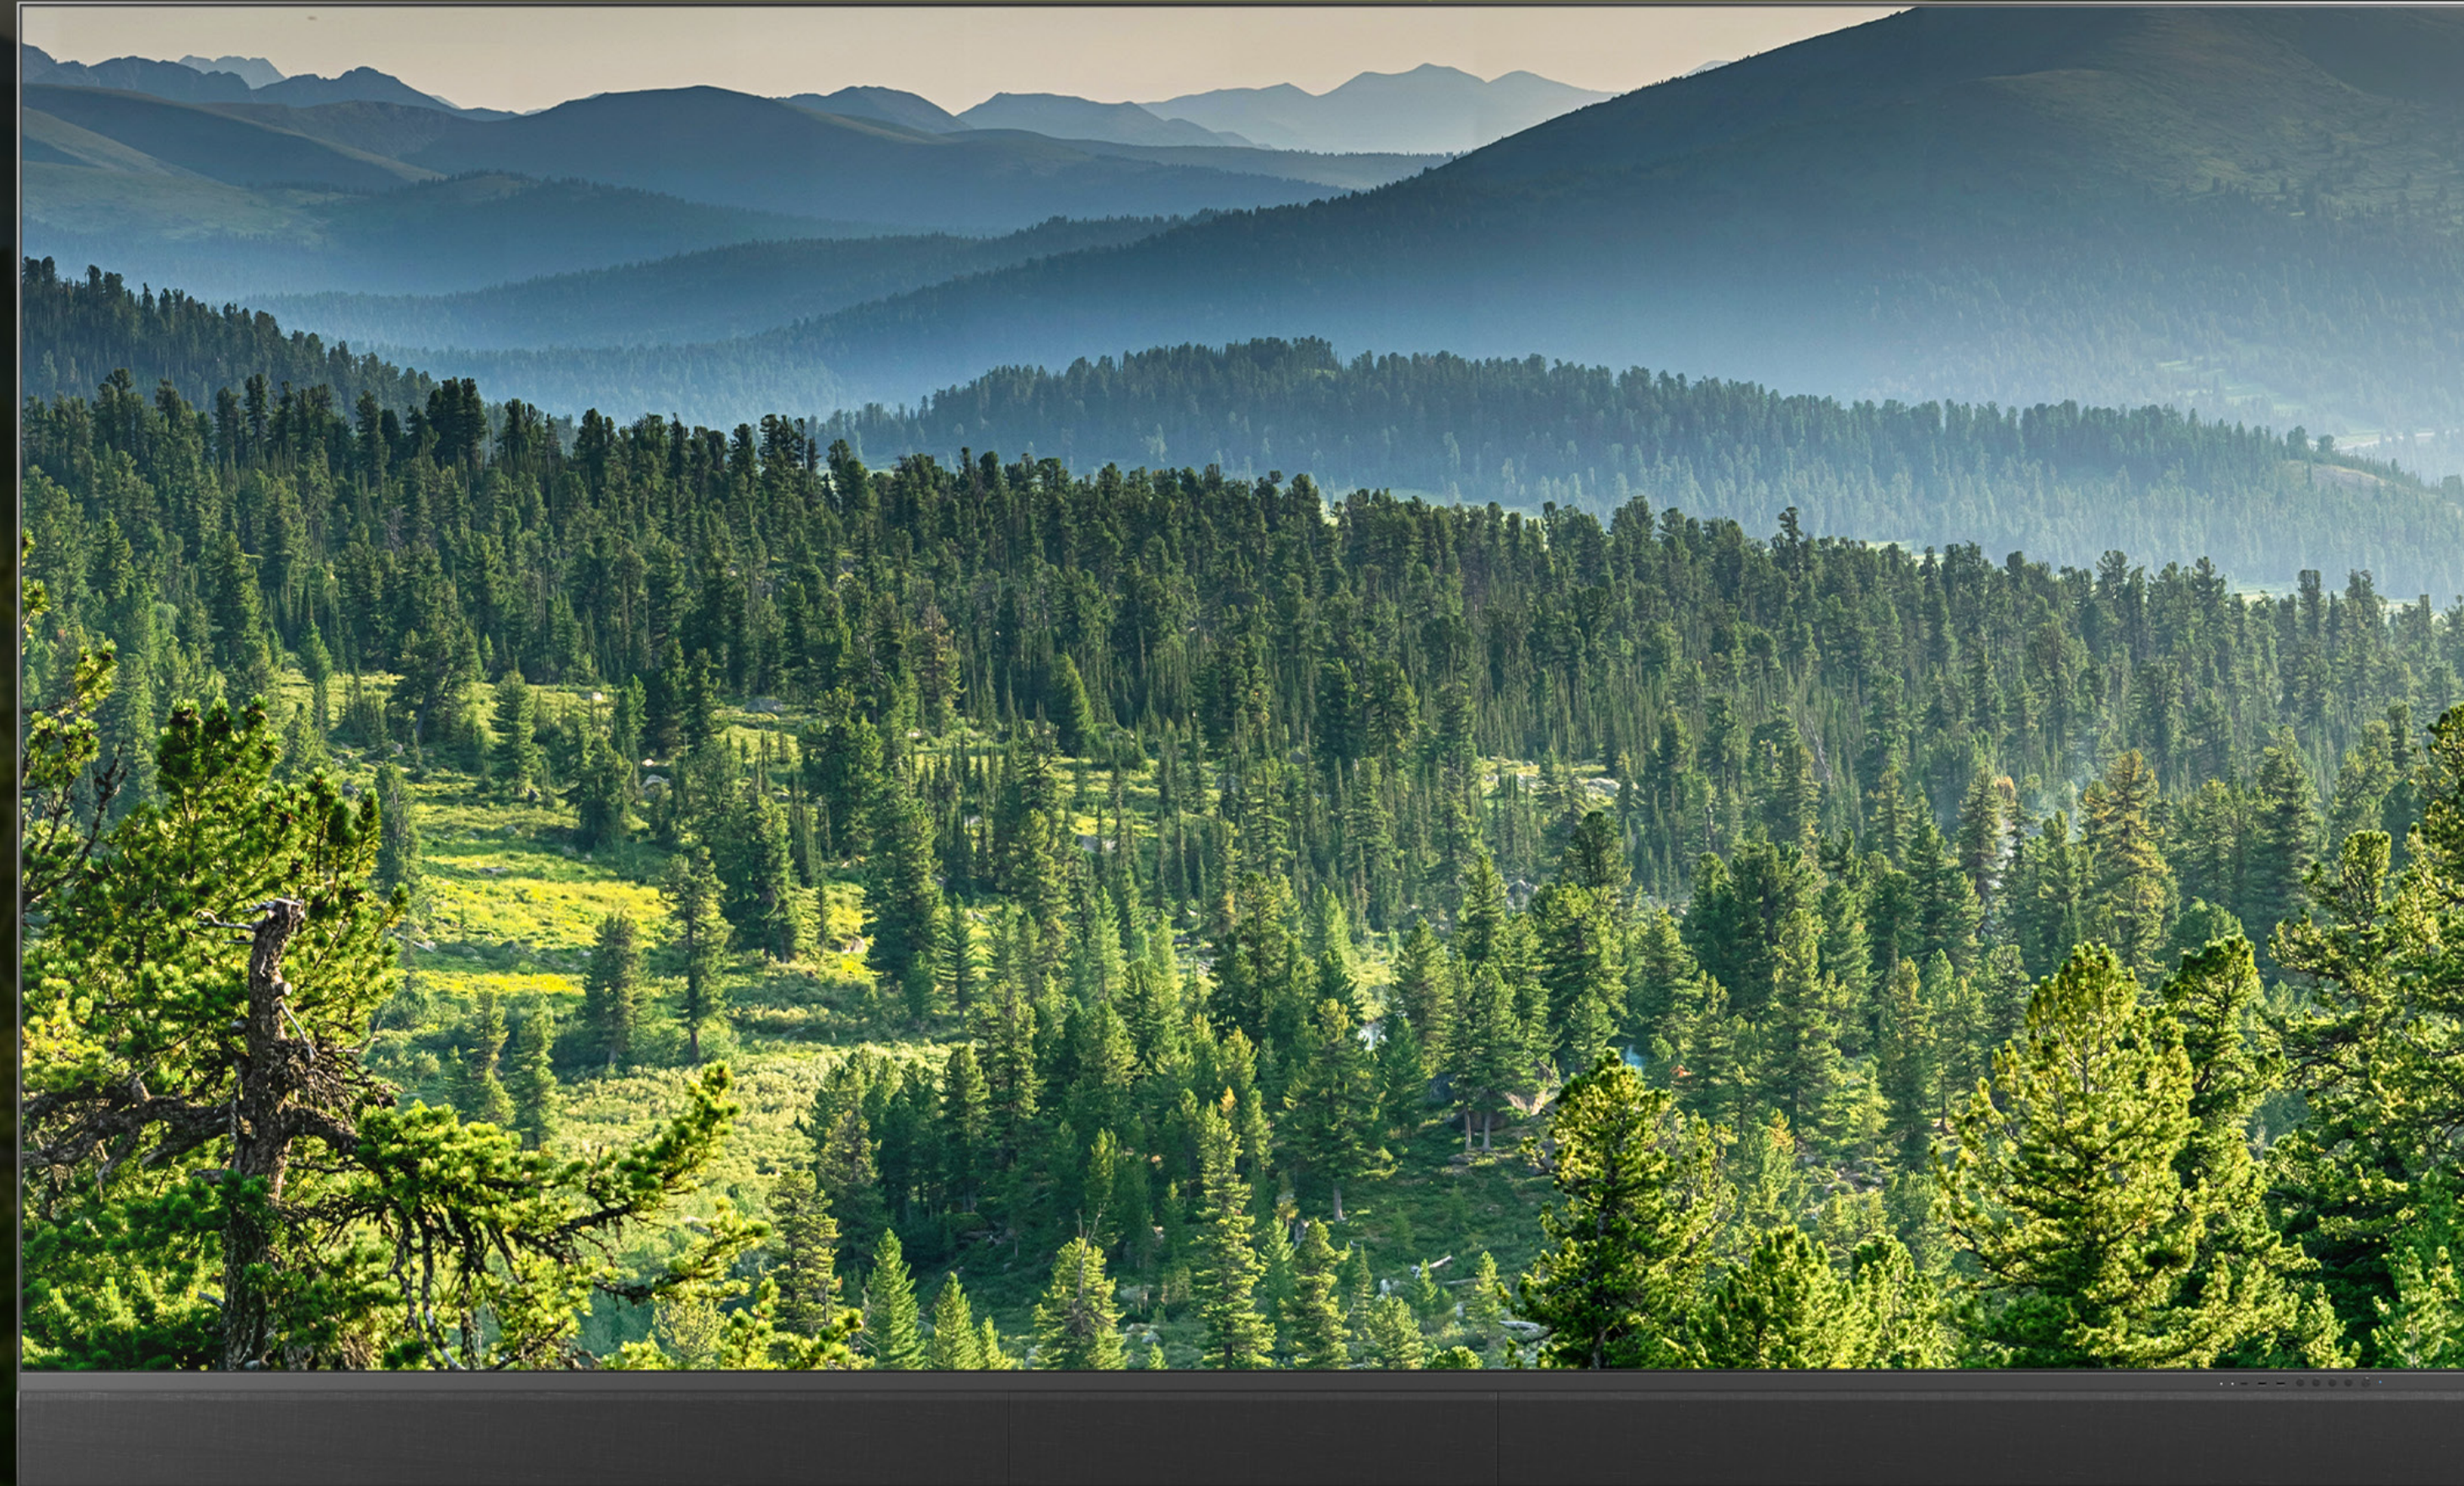

eXceptional audio built-in

ensures exceptional audio quality with studio-grade, professionally tuned clarity every time.

 Professional studio quality sound

 Build-in 2 x 30W speakers in the soundbar

 Built-in vibration dampening technology





eXtraordinary meetings

The solution is easy to use for the speaker and participants, who can either run PowerPoint from their laptop or use other presentation solutions.

Remote controlling made easy

Instant remote control also via tablet, smartphone and PC.



Remote control & wireless mouse (included)



Low latency / Fast response time



Mounting options

The all-in-one eXview PLUS is easy to place in auditorium, class-, meeting- or conferencerooms.

1 Wall-mounting

- Space saving
- Full front access
- Ultra-slim body

2 Wired-mounting

- Space saving
- Full front & back access
- Ultra-slim body

3 Foot-mounting

- Light-weight structure
- Fast installation
- Free movement

1



2



3



eXview PLUS

120"

138"

150"

165"

180"

220" 4K-UHD

Pixel & Module	Pixel pitch (mm)	1.3	1.5	1.7	1.9	2.0	1.2	
Electrical	Display size (cm)	266.4 x 149.9	305 x 171.6	333 x 187.3	366 x 205.8	399.6 x 224.8	488 x 274.5	
	Overall size (cm)	267.8 x 161.6 x 28.5	306.4 x 183.2 x 31	267.8 x 161.6 x 28.5	367.4 x 217.5 x 31	401 x 236.5 x 28.5	489.4 x 286.1 x 31	
	Weight (kg), not including bracket/wall mount-	90	140	135	190	190	330	
	Installation method	Foot mounting/Wall mounting				Wall mounting		
	Service access	Front						
	Surface Protection Technology (SPT™)	-	Option	-	Option	-	Option	
Electrical	Input voltage (nominal) [VAC] ± 10%	AC 100-240V 50/60Hz						
	Standby power consumption per screen (W)	≤ 0.5						
	Power consumption per screen (kW)	1.85	2.42	2.89	2.83	3.38	6.2	
	Typical power consumption per screen (kW)	0.74	0.97	1.16	1.35	1.35	2.48	
	ECO-labels	PFC; RoHS; EMC; WEEE						
	LED Life time (hrs)	≤ 100,000						
Approvals & Environmental	Protection level [IP]	30						
	Cooling	No fans						
	Operating temperature	-10°C - +40°C						
	Humidity (non-condensing)	10% - 85%						
Video	Physical resolution per screen	1,920 x 1,080				3,840 x 2,160		
	Viewing angle	170°H/170°V						
	Recommended viewing distance [m]	≤ 1.3	≤ 1.5	≤ 1.7	≤ 1.9	≤ 2	≤ 1.2	
	Brightness (calibrated) [nits or cd/m²] /non calibrated	600/800						
	Refresh rate standard chip driver [Hz]	3,840						
	Greyscale	16						
	Color temperature	6,500 - 9,300K						
Audio	Speakers	Build-in 2 x 30W speakers in the included soundbar						